

**SETTING THE STANDARD**  
for High Wheel Power Mowers Since 1935




Sarlo Power Mowers, Inc  
P.O. Box 1169 • Fort Myers, Florida 33902  
www.sarlomower.com  
Phone: (800) 749-5296  
(239) 332-1955  
Fax: (239) 332-7212


## WHY HIGH WHEELS?

- 1) Large diameter wheels roll easier, reducing resistance from turf and weeds, while overcoming holes.
- 2) High wheels allow better balance and create a pivot for maneuvering the mower.
- 3) High wheels allow bigger engines, without sacrificing balance or easy handling.

Sarlo high wheels hardly notice the holes, sand or soft turf that bog down low wheels and make pushing tough work.

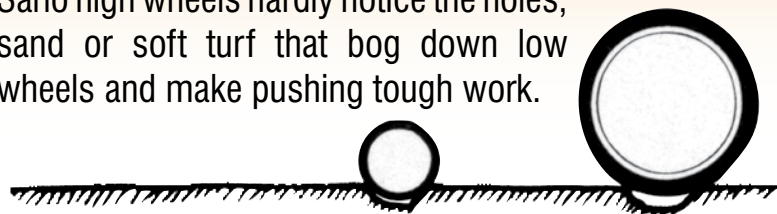

Sarlo high wheels roll over high grass and weeds that low wheels push against.

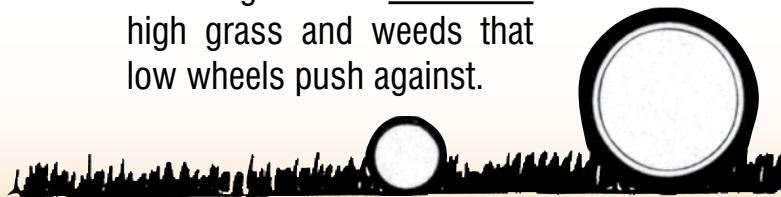

## POPULAR OPTIONS MAXIMIZE PERFORMANCE!

**Swivel Front Wheel Assembly\*** for ultimate maneuverability and clean finish cuts. Available in single or dual configurations.

\*Swivel wheels not available on 621-2 model.



**Mulching Plate** bolts quickly to Sarlo's Perfect Circle Deck to close discharge chute and create proper air circulation and clipping action for effective mulching.



# SETTING THE STANDARD

for High Wheel Power Mowers Since 1935

**Model SST6SP**



String-Trimmer/Mower, Powered by 6.0-6.75 HP B&S Engine, Self-propelled, 16" HD Spoke Wheels w/HD Ball Bearings, Easy load Spin Head, Plow Style Handles.

**Model SST6**



String-Trimmer/Mower, Powered by 6.0-6.75 HP B&S Engine, 16" Rear Plastic Wheels w/HD Ball Bearings, Easy load Spin Head, Plow Style Handles.



**HONDA  
ENGINE'S  
AVAILABLE**

**Model  
1026-3SPSW  
1030-3SPSW**



26" or 30" Cut, Powerful 11.5 HP Briggs, Side Discharge, 20" HD-Spoke Wheels, HD-Tires w/ Sealed HD Precision Ball Bearing, Dual Front Swivel Wheels, Plow Style Handles, Quick Height Adjustment, Self-propelled, 3 Speed Peerless Transmission, All Sealed Ball Bearings.

**Model  
1026-SSSW**



26" Cut, Powerful 11.5 HP Briggs, Side Discharge, 20" HD Spoke Wheels w/HD Ball Bearing, Plow Style Handles, Self-propelled, Full Differential, 8.25" X 2.50" Front Wheels.

**Model  
WX24SP**



24" Cut, Powered by 6.0-6.75 HP B&S Engine, 16" Heavy Duty Spoke Wheels and Ball Bearings, 8.25" X 2.50" w/HD Ball Bearing Front Wheels, Plow Style Handles, Quick Height Adjustment, Self-propelled, Full Differential.

**Model 621-2**



22" Side Discharge, Powered by 6.0-6.75 HP B&S Engine, 16" Rear Plastic Wheels and Ball Bearings, 8" Stationary Front Wheel, Plow Style Handles.

**Model 622**



22" Cut, Powered by 6.0-6.75 HP B&S Engine, Side Discharge, 16" HD Spoke Wheels and Ball Bearings, 8" Ball Bearing Front Wheels, Plow Style Handles, Quick Height Adjustment.

**Model 624**



24" Cut, Powered by 6.0-6.75 HP B&S Engine, Side Discharge, 20" Spoke Wheels w/ Sealed HD Precision Ball Bearings, 8" Ball Bearing Front Wheels, Plow Style Handles, Quick Height Adjustment.

**Model 624SPSW**



24" Cut, Powered by 6.0-6.75 HP B&S Engine, Side Discharge, Plow Style Handles, 20" HD Spoke Wheels, HD Tires w/ Sealed HD Precision Ball Bearing, 7" Swivel Front Wheels, Self-Propelled, Full Differential. Quick Height Adjustment.